

APPLICATION FOR U.S. PATENT
TRANSMITTAL FORM

Box Patent Application
THE COMMISSIONER OF PATENTS
AND TRADEMARKS
Washington, D.C. 20231

Attorney Docket No.:
020431.0560

Sir:

Transmitted herewith for filing is the patent application
of:

Inventors: Ranjit N. Notani

For: SYSTEM AND METHOD FOR PERFORMING A BUSINESS
PROCESS IN A MULTI-ENTERPRISE, COLLABORATING
NETWORK

Enclosed are: 5 Sheets of Informal Drawings

FEE CALCULATION					FEE
	Number		Number Extra	Rate	Basic Fee \$760.00
Total Claims:	28	-20 =	8	X \$18 =	\$144.00
Independent Claims	3	- 3 =	0	X \$78 =	\$0.00
TOTAL FILING FEE =					\$904.00

Enclosed is a check in the amount of \$904.00. Please charge
any additional fees or credit any overpayment to Deposit Account
No. 02-0384 of BAKER & BOTTS, L.L.P.

BAKER & BOTTS, L.L.P.
Attorneys for Applicant

October 8, 1999

Date

Samir A. Bhavsar
Samir A. Bhavsar
Registration No. 41,617



IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re Application of: Ranjit N. Notani
Date Filed: October 8, 1999
Title: SYSTEM AND METHOD FOR PERFORMING
A BUSINESS PROCESS IN A MULTI-
ENTERPRISE, COLLABORATING NETWORK

BOX PATENT APPLICATION

Honorable Assistant Commissioner
For Patents
Washington, D.C. 20231

Dear Sir:

CERTIFICATE OF MAILING BY EXPRESS MAIL

I hereby certify that the attached Patent Application, Declaration and Power of Attorney, 5 sheets of informal Drawings, Assignment, Assignment Cover Sheet, a check in the amount of \$40.00 to cover the assignment recording fee, Fee Transmittal, a check in the amount of \$904.00 to cover the application filing fee, and this Certificate of Mailing are being deposited with the United States Postal Service "Express Mail Post Office to Addressee" service under 37 C.F.R. § 1.10 on this 8th day of October, 1999 and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231.

Willie Jiles

Willie Jiles

Express Mail Receipt
No. EM 082632854 US
Attorney's Docket:
020431.0560

SYSTEM AND METHOD FOR PERFORMING A BUSINESS PROCESS
IN A MULTI-ENTERPRISE, COLLABORATING NETWORK

TECHNICAL FIELD OF THE INVENTION

5 This invention relates in general to data communication, and more particularly to a system for performing a business process using a business application in a multi-enterprise, collaborating network.

BACKGROUND OF THE INVENTION

Businesses rely on the electronic communication of information using communication links to perform business processes. In the past, for example, businesses have used Electronic Data Interchange (EDI) networks to buy, sell, and trade information and goods. EDI defines a set of business processes performed by software interfaces, translators, and mapping protocols that must adhere to strictly-defined EDI standards to communicate a business document from one business to another. Several national and international organizations oversee, maintain, and enhance these EDI standards.

The rate of change of business processes, however, is increasing due to such technology innovations as the Internet. The EDI solution to this problem has been to create multiple versions of its standards. Therefore, there is no one true standard for performing particular business processes, but rather a set of different standard versions. EDI defines no mechanism for how these multiple versions should interoperate.

One solution to this problem is the development of an entire industry directed to translating between the different versions of EDI. Translation is a particularly integral part of EDI operation. Translators describe the relationship between the data elements in the underlying business application and the EDI standards (ANSI X12, EDIFACT, and others) by interpreting the information and putting it into a standard EDI document format. A drawback to this approach is that each business must maintain a mapping from its internal system to the EDI standard with which it is sending and/or receiving messages from another business. Whenever a business upgrades to a new version of an EDI standard for performing particular business processes, all of its business partners are immediately affected and must immediately upgrade their translators. Therefore prior systems are not stable or scalable.

SUMMARY OF THE INVENTION

In accordance with the present invention, the disadvantages and problems associated with prior systems for performing business processes have been substantially
5 reduced or eliminated.

In accordance with one embodiment of the present invention, a system for performing a business process includes a first version of a business application that is identified using a first version identifier and executed by
10 a first client to perform a particular business process. A second version of the business application that is identified using a second version identifier and executed by a second client to perform the business process, wherein the second client is coupled to the first client using a
15 communication link. The second version of the business application determines a selected one of the first version of the business application and the second version of the business application to initiate the business process based upon the first version identifier and the second version
20 identifier.

Another embodiment of the present invention is a method for performing a business process that includes determining a first version identifier associated with a first version of a business application used by a first
25 client to perform a business process. The method continues by determining a second version identifier associated with a second version of the business application used by a second client to perform the business process. The method concludes by determining a selected one of the first
30 version of the business application and the second version of the business application to initiate the business process based upon the first version identifier and the second version identifier.

Technical advantages of the present invention include
35 a business application that executes to perform a particular business process and that may be categorized

using versions of varying degrees. Some versions of the business application are generally referred to as more robust, more advanced, or otherwise higher than other versions of the business application if they provide enhanced functionality or services in performing the associated business process. A particular advantage of the present invention is that higher level versions of a business application exhibit "backward compatibility" that allows them to understand, meaningfully interact with, or otherwise support lower level versions of the business application. For example, higher level versions of a business application can operate using files, message formats, protocols, data structures, commands, and other functionality associated with lower level versions of the business application. Therefore, higher level versions of a business application may exhibit backward compatibility by performing an associated business process according to the functionality of the lower level versions of the business application. A further technical advantage provided by the present invention is that the business applications exhibit "bidirectional executability" such that a particular business application may execute a business process that, from a business standpoint, it does not initiate itself.

Still further technical advantages of the present invention include a system for performing a business process in which a first client executes a first version of the business application to perform a business process and a second client coupled to the first client executes a second version of the business application to perform the business process. The client operating the higher level version of the business application is selected to execute the business process. By exhibiting backward compatibility and/or bidirectional executability the selected version of the business application performs the business process in a manner supported by the lower level version of the

business application maintained by its partner client. In this respect, the business process is executed between clients maintaining different versions of the business application.

5 Another advantage provided by the present invention is that because the business applications exhibit bidirectional executability and backward compatibility, a particular client can upgrade the version of a particular business application without negatively impacting any other
10 client in the system. As a result, the system is not in a constant state of change so that the system is stable with respect to time. Furthermore, the system can support many clients so that it is scalable in terms of size.

15 Other technical advantages are readily apparent to one skilled in the art from the following figures, descriptions and claims.

BRIEF DESCRIPTION OF THE DRAWINGS

For a more complete understanding of the present invention and its advantages, reference is now made to the following description taken in conjunction with the accompanying drawings, in which like reference numbers indicate like features and wherein:

FIGURE 1 illustrates a system for performing a business process according to the present invention;

FIGURE 2 illustrates one embodiment of a business application of the system;

FIGURES 3A and 3B illustrate exemplary communications between different clients of the system to perform a business process according to the present invention; and

FIGURE 4 is a flowchart of an exemplary method for performing a business process according to the present invention.

DETAILED DESCRIPTION OF THE INVENTION

FIGURE 1 illustrates a system 10 for performing a business process that includes clients 12a-12e, generally referred to as clients 12, coupled to each other using communication links 14. Clients 12 perform particular business processes with each other using corresponding business applications 16 that may be categorized according to varying degrees of versions 18. In general, higher level versions 18 of business applications 16 may understand, meaningfully interact with, or otherwise support lower level versions 18 of business applications 16. In this respect, a higher level version 18 of a business application 16 can perform the associated business process according to the functionality of any lower level version 18 of the business application 16. Therefore, a first client 12 seeking to perform a particular business process with a second client 12 using a business application 16 determines which client 12 executes the particular business process using the higher level version 18 of the business application 16. The determined client 12 then performs the business process in a manner supported by the lower level version 18 of the business application 16.

Clients 12 comprise computers, workstations, or any other suitable combination of processing and memory devices that include the appropriate hardware and software capabilities to execute business applications 16. Clients 12 communicate with each other using hardware and software associated with links 14. For example, clients 12 couple to each other using communication devices that may include any combination of hubs, routers, bridges, gateways, firewalls, switches, remote access devices, or any other association of suitable communication devices and related software that facilitate communication among clients 12 using links 14. Although FIGURE 1 illustrates clients 12a-12e, it should be understood that system 10 may include any

number and combination of clients 12. Clients 12 perform particular business processes with other clients 12, generally referred to as partner clients 12, using the appropriate business applications 16.

5 A business process comprises any transaction between clients 12 that involves the exchange of information using a business application 16. Although the following description of system 10 is detailed with reference to a particular type of business process, such as an "Order
10 Purchasing" business process, it should be understood that system 10 supports any appropriate type of business process in any suitable business industry. For example, system 10 supports business processes in the consumer goods manufacturing industry (e.g., order purchasing, accounting,
15 procurement, shipping, delivery, replenishment, inventory management, marketing automation, and supply chain integration); the distribution industry (e.g., tracking, shipping, and routing); the financial services industry (e.g., electronic funds transfer, electronic payment
20 systems, security systems); and any suitable type of business process in any other business industry.

Each link 14 may be a dedicated or switched link over the public switched telephone network (PSTN), a satellite link, a microwave link, or any other appropriate
25 communication link between clients 12. The components of system 10 may be part of a local area network (LAN), a wide area network (WAN), a virtual private network (VPN), or any other suitable arrangement of interconnected computing devices that form a multi-enterprise, collaborating
30 network. In a particular embodiment, clients 12 in system 10 communicate over the Internet using the worldwide web (WWW), file transfer protocol (FTP), or any other communication technique. For example, clients 12 may maintain and execute a browser or other suitable program
35 for accessing and communicating information addressed by a uniform resource locator (URL) using links 14.

Each business application 16 comprises a software computer program written in any suitable computer language that may be compiled based on the instructions of a selected computer operating system associated with a corresponding client 12. Business applications 16 are described in greater detail with reference to FIGURE 2. In general, each business application 16 executes to perform a particular business process and may be categorized using versions 18. Some versions 18 of a particular business application 16 are generally referred to as more robust, more advanced, or otherwise higher than other versions 18 of the business application 16 if they provide enhanced functionality or services in performing the associated business process. The particular versions 18 of a business application 16 may be indicated using version identifiers.

A particular advantage of system 10 is that higher level versions 18 of a business application 16 exhibit "backward compatibility" that allows them to understand, meaningfully interact with, or otherwise support lower level versions 18 of the business application 16. For example, higher level versions 18 of a business application 16 can operate using files, message formats, protocols, data structures, commands, and other functionality associated with lower level version 18 of business application 16. Therefore, higher level versions 18 of a business application 16 may exhibit backward compatibility by performing an associated business process according to the functionality of the lower level versions 18 of the business application 16. Although business applications 16 support backward compatibility, it should be understood that whether a particular version 18 of a business application 16 actually executes backward compatibility is based in part upon, for example, the versions 18 of the business application 16 maintained by its partner clients.

Clients 12 of system 10 may perform different activities depending upon the particular business process

to be executed. For example, during the execution of a
order purchasing business process, respective clients 12
may perform buyer and/or seller activities, and are
therefore generally referred to as buyer clients 12 and
5 seller clients 12. A further technical advantage provided
by system 10 is that business applications 16 exhibit
"bidirectional executability" such that a particular
business application 16 may execute a business process
that, from a business standpoint, it does not initiate
10 itself. For example, a portion of the order purchasing
business process may involve a buyer client 12
communicating a purchase order to a seller client 12. From
a business standpoint, this business process is initiated
by the buyer client 12, so that the buyer client 12 may be
15 referred to as a "business initiator." However, the higher
level version 18 of business application 16 may execute the
order purchasing business process even if it is maintained
by a seller client 12 rather than by the buyer client 12
that is the business initiator. Although business
20 applications 16 support bidirectional executability, it
should be understood that whether a particular version 18
of business application 16 exhibits bidirectional
executability is based in part upon, for example, whether
the client 12 maintaining the business application 16 is
25 the business initiator for the particular business process.

In operation, clients 12 execute business applications
16 to perform one or more business processes in system 10.
Although the following description of FIGURE 1 is detailed
with respect to a first client 12 and a second client 12,
30 it should be understood that the business processes may be
executed by any appropriate number and combination of
clients 12 in system 10. A first client 12, such as a
business initiator seeking to perform a particular business
process with a second client 12, determines which client 12
35 maintains a higher level version 18 of the appropriate
business application 16 used to execute the business

process. In one embodiment, the first client 12 communicates a request to identify the version 18 of the business application 16 maintained by the second client 12. In another embodiment, the first client 12 stores information identifying the version 18 of the appropriate business application 16 maintained by each of its partner clients 12, such as the second client 12, to perform the particular business process. This information may be validated by each partner client 12 for a predetermined duration of time during which the version 18 of the business application 16 will not change.

The client 12 having the higher level version 18 of the appropriate business application 16 exhibits "backward compatibility" and/or "bidirectional executability" to execute the particular business process with the other client 12. In particular, the client 12 having the higher level version 18 of the business application 16 performs the particular business process in a manner supported by the lower level version 18 of the business application 16 maintained by its partner client 12. In this respect, the business process is executed between clients 12 maintaining different versions 18 of the business application 16.

A problem with prior systems using EDI, for example, is that businesses employing different versions of EDI standards to perform a business process must maintain a mapping from these internal systems to the EDI standard with which they are sending and/or receiving messages from other businesses. Whenever a particular business upgrades to a new version of an EDI standard for performing particular business processes, all of its business partners are immediately affected and must immediately upgrade their translators. A technical advantage provided by system 10 is that because business applications 16 support "bi-directional executability" and "backward compatibility," a particular client 12 can upgrade the version 18 of a

particular business application 16 without negatively impacting any other client 12 in system 10.

Referring to FIGURE 1 to illustrate an example of this advantage, client 12a performs a particular business process using a first version 18 of an appropriate business application 16. The first version 18 of business application 16 may comprise the lowest level version 18 maintained by any of clients 12 with which client 12a performs the indicated business process. Clients 12b, 12c, and 12d execute the business process using a second version 18 of the appropriate business application 16 that is a higher version than that maintained by client 12a. Furthermore, client 12e performs the business process using a third version of business application 16 that is a higher version 18 than those maintained by any of clients 12a-12d.

In this example, if client 12c is a business initiator seeking to perform the business process with client 12a, client 12c determines that it maintains the higher level version 18 of the appropriate business application 16. As a result, client 12c exercises control in executing the business process with client 12a according to the functionality of the lower level version 18 of the business application 16 maintained by client 12a.

If client 12c is a business initiator seeking to perform the business process with either of clients 12b or 12d, client 12c determines that it maintains the same version 18 of business application 16 as clients 12b and 12d. In this situation, the business application 16 of business initiator, such as client 12c, generally executes the business process and therefore does not exhibit bidirectional executability in this particular situation. Furthermore, because the versions 18 of business application 16 are the same among clients 12b, 12d, and 12c, the business application 16 of client 12c does not exhibit backward compatibility in this particular situation.

If client 12c is a business initiator seeking to perform the business process with client 12e, client 12c determines that client 12e maintains the higher level version 18 of business application 16. As a result, client 12e exercises control in executing the business process according to the functionality of the lower level version 18 of the business application 16 maintained by client 12c. In each of the above-identified arrangements of partner clients 12, the business process is executed in a manner supported by the business applications 16 of each client 12 regardless of the particular version 18 maintained by any given client 12.

Assuming now that client 12c upgrades its version 18 of business application 16 from the second version 18 to a fourth version 18 that is a higher version than those maintained by clients 12a, 12b, 12d, or 12e. Client 12c now maintains the highest level version 18 of business application 16 among its partner clients 12. Previously, clients 12b and 12d maintained the same version 18 of business application 16 as client 12c. However, clients 12b and 12d now maintain lower versions 18 of business application 16 than client 12c. Therefore, system 10 grants control to client 12c to initiate and execute the business process with either of clients 12b or 12d according to the functionality of the lower level version 18 of the business application 16 maintained by clients 12b and 12d. Previously, client 12e maintained a higher version 18 of business application 16 than client 12c. The situation is now reversed. In particular, because client 12c maintains a fourth version 18 of business application 16 and client 12e maintains a third version 18 of business application 16, client 12c receives control to execute the business process according to the lower level version 18 of the business application 16 maintained by client 12e. The situation between clients 12c and 12a remains unchanged

because client 12c still maintains a higher level version 18 of business application 16 than client 12a.

None of clients 12a, 12b, 12d, or 12e are impacted by the upgrade of business application 16 by client 12c. In particular, none of clients 12a, 12b, 12d, or 12e need to upgrade their respective business applications 16 in order to perform a business process with client 12c even though client 12c upgraded its version 18 from a second version 18 to a fourth version 18 of business application 16. This is because client 12c executes the business process with respect to each of clients 12a, 12b, 12d, and 12e, and because business application 16 of client 12 exhibits backward compatibility that allows it to execute the business process according to the functionality of any lower level versions 18 of the business application 16, such as the business applications 16 of clients 12a, 12b, 12d, and 12e.

Even if client 12c is not the "business initiator" of the business process, the business application 16 of client 12c can still execute the business process because it supports bidirectional executability. Business applications 16 of clients 12b, 12d, and 12e may operate differently after the upgrade of business application 16 by client 12c because the control of the business process is no longer with them, but they do not need to be upgraded, or modified in any manner, in order to perform the business process with client 12c. Because a particular client 12 of system 10 may upgrade the version 18 of a particular business application 16 without negatively affecting any of its partner clients 12, system 10 is stable and scaleable. In particular, system 10 is not in a constant state of change so that system 10 is stable with respect to time. Furthermore, system 10 can support many clients 12 so that it is scaleable in terms of size. Moreover, many clients 12 provide back-end integration of business applications 16 to systems such as inventory, planning, ERP, and financial

systems. The use of business applications 16 allows these systems to be preserved because business applications 16 may also be backward compatible with these systems. In this respect the back-end systems are generally shielded from upgrades to business applications 16.

FIGURE 2 illustrates business application 16 in more detail. A business application 16 comprises a business process module 30 coupled to a version identification module 32 and a status message module 34. Business process module 30 includes software code, parameters, protocols, and other instructions and data structures that execute to perform the business process associated with the particular business application 16. For example, business process module 30 generates and/or communicates business messages 35 to perform the business process. Business messages 35 comprise request messages, response messages, or any other type of communication between clients 12 to facilitate the execution of a business process. Business messages 35 may be generated in a manner supported by lower level versions 18 of the business application 16. In this respect, the features and functions of business process module 30 may be enhanced, increased, or otherwise upgraded with each version 18 of a particular business application 16. The business process module 30 supports the backward compatibility and bidirectional executability described above with reference to the business application 16.

Version identification module 32 comprises software code, parameters, protocols, and other instructions and data structures that execute to determine which client 12 among a group of partner clients 12 maintains a higher level version 18 of a particular business application 16 used to perform a particular business process. In one embodiment, version identification module 32 may generate a version identification request 36 for communication to one or more partner clients 12. A version identification request 36 comprises a request for information identifying

the version 18 of a particular business application 16. Module 32 generates the version identification request 36 according to a version identification protocol that configures the request 36 in a format supported by any version 18 of the appropriate business application 16. In this respect, version identification modules 32 remain unchanged among varying degrees of versions 18 for a particular business application 16.

Status message module 34 comprises software codes, parameters, protocols and other instructions and data structures that execute to generate a status message 38 for communication to one or more partner clients 12. Status messages 38 comprise information indicating the presence of a business message 35 associated with the business process. Status message module 34 generates the status message 38 according to a status message protocol that configures status message 38 in a format supported by any version 18 of the appropriate business application 16. In this respect, status message modules 34 remain unchanged among varying degrees of versions 18 for the appropriate business application 16.

FIGURES 3A and 3B illustrate exemplary communications between different clients 12 of system 10 to perform a business process. Although the description of FIGURES 3A and 3B is detailed with respect to a buyer client 12 and a seller client 12 performing an order purchasing business process, it should be understood that the features and functions of system 10 support any suitable business process among any number and combination of clients 12. The business initiator of the business process, such as buyer client 12, communicates a version identification request 36 to the seller client 12 at 40. Version identification module 32 of the appropriate business application 16 for buyer client 12 generates version identification request 36 according to the version identification protocol supported by all versions 18 of the

business application 16. Seller client 12 communicates a version identifier at 42 in response to the version identification request 36 to indicate the version 18 of the business application 16 maintained by seller client 12 to perform the order purchasing business process.

Upon determining the version 18 of the business application 16 maintained by seller client 12 based upon the communication by seller client 12 at 42 or, in one embodiment, according to version identifiers stored locally, buyer client 12 determines one of buyer client 12 and seller client 12 to initiate the business process. Business process module 30 of the appropriate business application 16 for buyer client 12 selects buyer client 12 to execute the business process if the version 18 of business application 16 for seller client 12 is not higher than the version 18 of business application 16 for buyer client 12. FIGURE 3A illustrates an example of buyer client 12 maintaining a higher level version 18 of business application 16 than seller client 12. FIGURE 3B illustrates an example of seller client 12 maintaining a higher level version 18 of business application 16 than buyer client 12.

Referring back to FIGURE 3A, buyer client 12 communicates to seller client 12 a business message 35, such as a purchase order associated with the order purchasing business process, at 44. Business process module 30 of business application 16 for buyer client 12 generates the business message 35 according to the version 18 of business application 16 maintained by seller client 12. In this regard, business application 16 for buyer client 12 exhibits backward compatibility with business application 16 of seller client 12 to perform the business process.

Seller client 12 communicates a status message 38 to buyer client 12 at 46 to indicate the presence of a business message 35 associated with the business process.

The status message module 34 of the appropriate business application 16 maintained by seller client 12 generates the status message 38 according to a status message protocol that is supported by all versions 18 of the business application 16. The status message 38 essentially indicates to buyer client 12 that a business message 35 is pending for it at seller client 12. A technical advantage provided by the status message 38 is that it eliminates the need for buyer client 12 to repeatedly poll seller client 12 in order to detect the availability of pending messages 35. The status message 38 communicated by seller client 12 to buyer client 12 at 46 is associated with an identifier for the business process for which the business message is pending. Therefore, in a order purchasing business process performed by client 12, the status message 38 may indicate the presence of a business message 35, such as an acknowledgment to the purchase order, associated with an identifier of the order purchasing business process.

In response to receiving a status message 38 at 46, buyer client 12 retrieves the appropriate business message 35 from seller client 12 at 48. Business process module 30 of the application 16 maintained by buyer client 12 generally retrieves a business message 35 at 48 using commands, data structures, message formats, and other functionality according to the lower level version 18 of business application 16 maintained by seller client 12. Further communications may be made by buyer client 12 and/or seller client 12 to complete the appropriate business process in a manner similar to the communications described above with reference to FIGURE 3A.

FIGURE 3B illustrates another example of the communications made by buyer client 12 and seller client 12 while performing the order purchasing business process described above with reference to FIGURE 3A. More specifically, FIGURE 3B illustrates communications made between buyer client 12 and seller client 12 where buyer

client 12 determines that seller client 12 maintains a higher level version 18 of the appropriate business application 16 based upon the version identification request 36 communicated at 40 and the version identifier received by buyer client 12 at 42. Therefore, seller client 12 maintains control over the execution of the business process.

The version identification request 36 communicated by buyer client 12 at 40 indicates to seller client 12 that buyer client 12 has generated a business message associated with the order purchasing business process. Seller client 12 retrieves the business message 35 from buyer client 12 at 60 using the commands, data structures, message formats and functionality associated with the lower level version 18 of the business application 16 maintained by buyer client 12. In this respect, the business application 16 of seller client 12 exhibits backward compatibility to communicate seamlessly with lower level versions 18 of business application 16. The business message 35 retrieved by seller client 12 performing the order purchasing business process may comprise a purchase order generated by buyer client 12.

Seller client 12 generates and communicates a business message 35, such as an acknowledgment to the purchase order, at 62 according to the lower level version 18 of business application 16 maintained by buyer client 12. Buyer client 12 communicates a status message 38 to seller client 12 at 64 to indicate the presence of a business message 35 associated with the business process, such as a response to the seller client 12 acknowledgment. Status message module 34 of business application 16 for buyer client 12 generates the status message 38 according to the status message protocol supported by all versions 18 of business application 16. In response to receiving the status message 38 at 64, seller client 12 retrieves the business message 35 generated by buyer client 12 at 66

using functionality associated with the lower level version 18 of business application 16 maintained by buyer client 12.

5 A technical advantage associated with system 10 is that although buyer client 12 is the business initiator in the order purchasing business process illustrated in FIGURE 3B, the seller client 12 exhibits bidirectional executability to control the execution of the business process, and further exhibits backward compatibility to perform the business process according to the functionality of the lower level version 18 of business application 16 maintained by buyer client 12.

10 FIGURE 4 is a flowchart of an exemplary method for performing a business process according to the present invention. The method begins at steps 70 where a first client 12, such as a business initiator, performs an inquiry of partner clients 12 to determine the versions 18 of the business applications 16 maintained by the partner clients 12 for the particular business process to be executed. In particular, the first client 12 communicates to each of its partner clients 12 a version identification request 36 associated with the particular business process, at step 72. Although the first client 12 may perform the business process with any number and combination of partner clients 12, the following description of FIGURE 4 will be detailed with respect to a first client 12 and a second client 12. The first client 12 receives a version identifier from the second client 12 at step 74. The version identifier indicates the version 18 of the business application 16 maintained by the second client 12 to perform the identified business process.

25 The first client 12 determines whether it maintains the higher level version 18 of the appropriate business application 16 at step 80. If so, execution proceeds to steps 82 where the first client 12 executes the business process according to the functionality of the lower level

version 18 of the business application 16 maintained by the second client 12. If the first client 12 does not maintain the higher level version 18 of the business application 16 as determined at step 80, execution proceeds to steps 84
5 where the second client 12 executes the business process according to the functionality of the lower level version 18 of the business application 16 maintained by the first client 12.

Referring to steps 82, the first client 12
10 communicates to the second client 12 a business message 35 at step 90. The business application 16 of the first client 12 exhibits backward compatibility to generate the business message 35 according to the functionality of the lower level version 18 of the business application 16
15 maintained by the second client 12. The first client 12 receives a status message 38 at step 92 indicating the presence of a business message 35 generated by the second client 12 in response to the business message 35 communicated by the first client 12 at step 90. The status
20 message 38 received at step 92 is generated according to a status message protocol supported by all versions 18 of the appropriate business application 16. The first client 12 retrieves the business message 35 generated by the second client 12, at step 94, using commands, data structures,
25 message formats, and functionality associated with the lower level version 18 of business application 16 maintained by the second client 12. The first client 12 determines whether to communicate another business message 35 at step 96. If so, execution returns to step 90. If
30 not, execution terminates at step 110.

Referring to steps 84, the second client 12 retrieves a business message 35 from the first client 12 at step 100 in response to the inquiry performed by the first client 12 at steps 70. Second client 12 retrieves the business
35 message 35 from the first client 12 using commands, data structures, message formats, and functionality associated

with the lower level version 18 of the business application 16 maintained by the first client 12. In this respect, the business application 16 of the second client 12 exhibits both bidirectional executability and backward compatibility. The second client 12 communicates a business message 35 to the first client 12 at step 102 and receives a status message at step 104 indicating the presence of a business message 35 generated by the first client 12 according to the status message protocol supported by all versions 18 of the business application 16. The second client 12 retrieves the business message 35 generated by the first client 12 at step 106 according to the functionality associated with the lower level version 18 of business application 16 maintained by the first client 12. The second client 12 determines whether to communicate another business message 35 at step 108. If so, execution returns to step 102. If not, execution terminates at step 110.

Although the present invention has been described in several embodiments, a myriad of changes, variations, alterations, transformations, and modifications may be suggested to one skilled in the art, and it is intended that the present invention encompass such changes, variations, alterations, transformations, and modifications as fall within the spirit and scope of the appended claims.

WHAT IS CLAIMED IS:

1. A system for performing a business process, comprising:

5 a first version of a business application that is identified using a first version identifier and executed by a first client to perform a particular business process; and

10 a second version of the business application that is identified using a second version identifier and executed by a second client to perform the business process, wherein the second client is coupled to the first client using a communication link and the second version of the business application is operable to determine a selected one of the first version of the business application and the second
15 version of the business application to initiate the business process based upon the first version identifier and the second version identifier.

2. The system of Claim 1, wherein:

20 the second version of the business application comprises a version identification module operable to generate a version identification request for communication to the first client, wherein the version identification request is associated with the particular business process and generated according to a version identification
25 protocol supported by the first version of the business application and the second version of the business application; and

30 the first version of the business application comprises a version identification module operable to initiate communicating the first version identifier to the second version of the business application in response to the version identification request.

3. The system of Claim 1, wherein the second version
of the business application is operable to control the
business process if the first version of the business
application is not higher than the second version of the
business application.

4. The system of Claim 3, wherein the second version
of the business application further comprises a business
process module operable to:

generate a first business message associated with
the business process for communication to the first
client, the first business message generated according
to the first version of the business application; and
initiate retrieving from the first client a
second business message generated according to the
first version of the business application.

5. The system of Claim 3, wherein the first version
of the business application further comprises a status
message module operable to generate a status message for
communication to the second client to indicate the presence
of a business message associated with the business process,
the status message generated according to a status message
protocol supported by the first version of the business
application and the second version of the business
application.

6. The system of Claim 1, wherein the first version
of the business application is operable to control the
business process if the first version of the business
application is higher than the second version of the
business application.

7. The system of Claim 6, wherein the first version of the business application further comprises a business process module operable to:

5 initiate retrieving from the second client a first business message associated with the business process, the first business message generated according to the second version of the business application; and

10 generate a second business message associated with the business process for communication to the second client, the second business message generated according to the second version of the business application.

15 8. The system of Claim 6, wherein the second version of the business application further comprises a status message module operable to generate a status message for communication to the first client to indicate the presence of a business message associated with the business process,
20 the status message generated according to a status message protocol supported by the second version of the business application and the first version of the business application.

9. A method for performing a business process, comprising:

determining a first version identifier associated with a first version of a business application used by a first client to perform a business process;

determining a second version identifier associated with a second version of the business application used by a second client to perform the business process; and

determining a selected one of the first version of the business application and the second version of the business application to initiate the business process based upon the first version identifier and the second version identifier.

10. The method of Claim 9, further comprising:

generating a version identification request for communication to the first client; and

receiving the first version identifier in response to the version identification request.

11. The method of Claim 10, wherein the step of generating comprises generating the version identification request according to a version identification protocol that is supported by the first version of the business application and the second version of the business application.

12. The method of Claim 9, further comprising controlling the business process by the second version of the business application if the first version of the business application is not higher than the second version of the business application.

13. The method of Claim 12, further comprising:
generating a first business message associated with
the business process for communication to the first client,
the first business message generated according to the first
5 version of the business application; and

retrieving a second business message generated by the
first client according to the first version of the business
application.

10 14. The method of Claim 12, further comprising:
receiving a status message generated by the first
client according to a status message protocol that is
supported by the first version of the business application
and the second version of the business application, the
15 status message indicating the presence of a business
message associated with the business process; and

retrieving the business message from the first client
in response to the status message.

20 15. The method of Claim 9, further comprising
controlling the business process by the first version of
the business application if the first version of the
business application is higher than the second version of
the business application.

25 16. The method of Claim 15, further comprising:
retrieving from the second client a first business
message associated with the business process, the first
business message generated according to the second version
30 of the business application; and

communicating to the second client a second business
message generated according to the second version of the
business application.

17. The method of Claim 15, further comprising:

receiving a status message generated by the second client according to a status message protocol supported by the first version of the business application and the second version of the business application, the status message indicating the presence of a business message associated with the business process; and

retrieving the business message from the second client in response to the status message.

18. The method of Claim 9, further comprising:

performing the business process according to the first version of the business application if the first version of the business application is not higher than the second version of the business application; and

performing the business process according to the second version of the business application if the first version of the business application is higher than the second version of the business application.

19. A business application for performing a business process, the application encoded on a computer-readable medium and operable to execute the following steps:

5 determining a first version identifier associated with a first version of the business application used by a first client to perform a business process;

determining a second version identifier associated with a second version of the business application used by a second client to perform the business process; and

10 determining a selected one of the first client and the second client to initiate the business process based upon the first version identifier and the second version identifier.

15 20. The business application of Claim 19, further comprising:

generating a version identification request for communication to the first client; and

20 receiving the first version identifier in response to the version identification request.

21. The business application of Claim 20, wherein the step of generating comprises generating the version identification request according to a version identification protocol that is supported by the first version of the business application and the second version of the business application.

22. The business application of Claim 19, further comprising controlling the business process by the second version of the business application if the first version of the business application is not higher than the second version of the business application.

23. The business application of Claim 22, further comprising:

5 generating a first business message associated with the business process for communication to the first client, the first business message generated according to the first version of the business application; and

retrieving a second business message generated by the first client according to the first version of the business application.

10

24. The business application of Claim 22, further comprising:

15 receiving a status message generated by the first client according to a status message protocol that is supported by the first version of the business application and the second version of the business application, the status message indicating the presence of a business message associated with the business process; and

20 retrieving the business message from the first client in response to the status message.

25 25. The business application of Claim 19 further comprising controlling the business process by the first version of the business application if the first version of the business application is higher than the second version of the business application.

26. The business application of Claim 25, further comprising:

5 retrieving from the second client a first business message associated with the business process, the first business message generated according to the second version of the business application; and

communicating to the second client a second business message generated according to the second version of the business application.

10

27. The business application of Claim 25, further comprising:

15 receiving a status message generated by the second client according to a status message protocol supported by the first version of the business application and the second version of the business application, the status message indicating the presence of a business message associated with the business process; and

20 retrieving the business message from the second client in response to the status message.

28. The business application of Claim 19, further comprising:

25 performing the business process according to the first version of the business application if the first version of the business application is not higher than the second version of the business application; and

30 performing the business process according to the second version of the business application if the first version of the business application is higher than the second version of the business application.

SYSTEM AND METHOD FOR PERFORMING A BUSINESS PROCESS
IN A MULTI-ENTERPRISE, COLLABORATING NETWORK

5 ABSTRACT OF THE DISCLOSURE

10 A system for performing a business process includes a
first version of a business application executed by a first
client to perform a particular business process and a
second version of the business application executed by a
15 second client to perform the business process, wherein the
first client is coupled to the second client using a
communication link. The first version of the business
application is identified using a first version identifier
and the second version of the business application is
20 identified using a second version identifier. One of the
first version of the business application and the second
version of the business application is selected to initiate
the business process based upon the first version
identifier and the second version identifier.

25

30

FIGURE 1

102

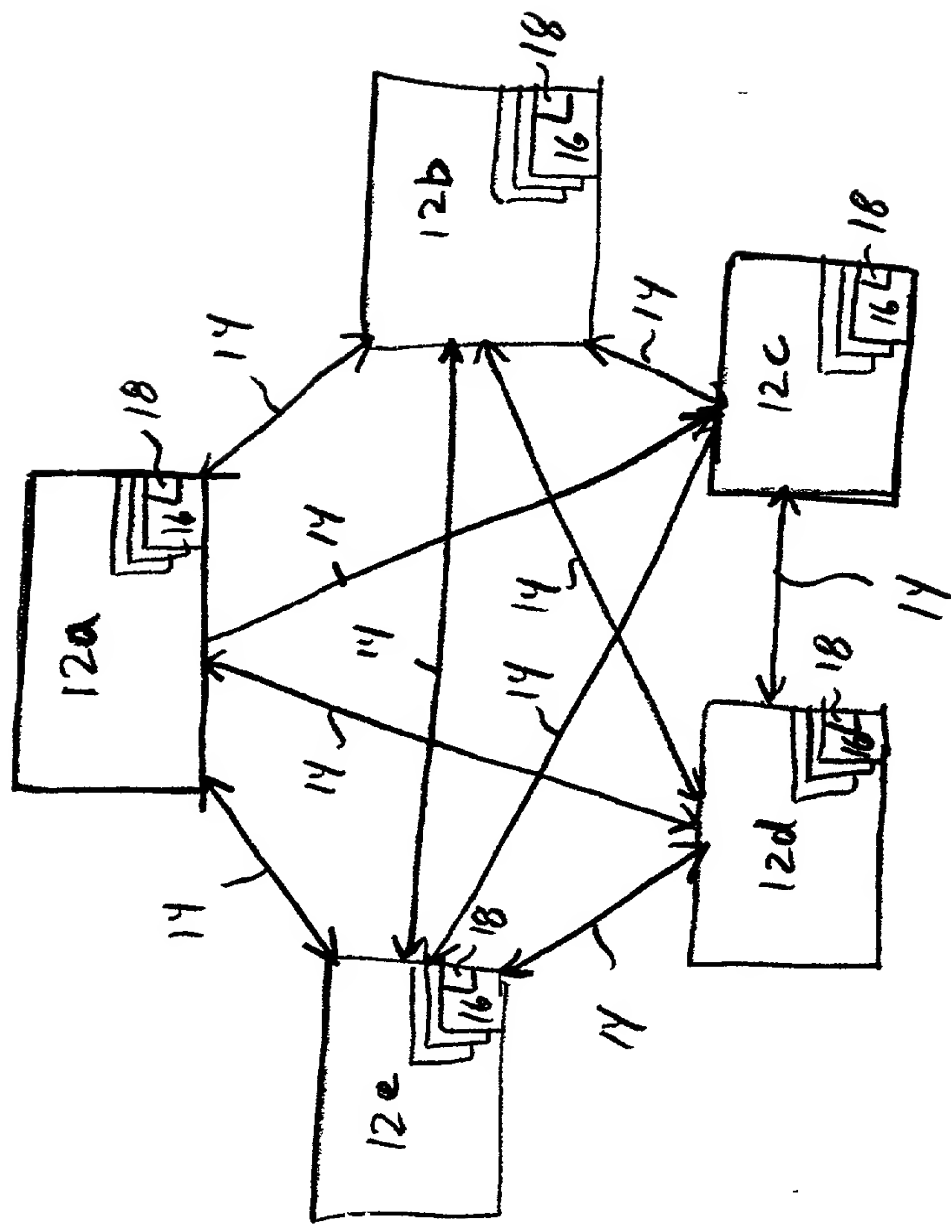


FIGURE 2

FIGURE 2

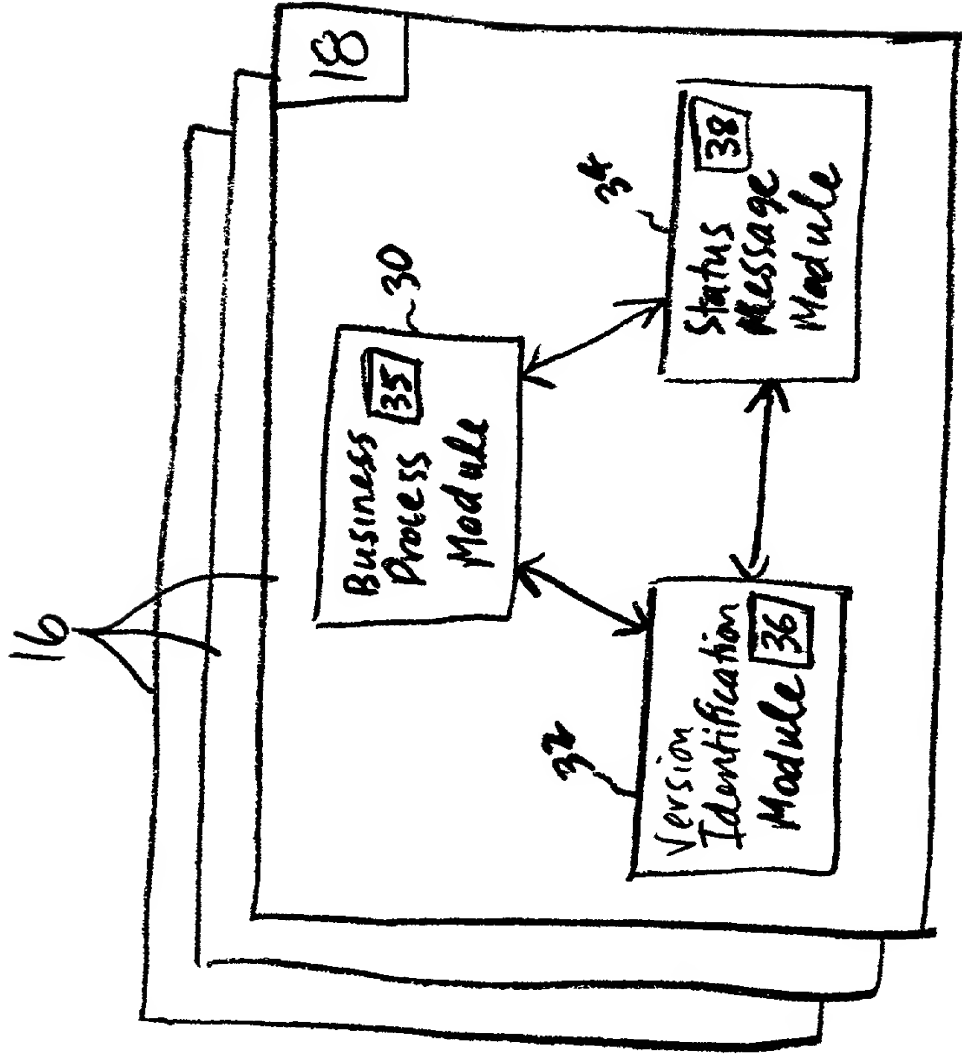


FIGURE 3A



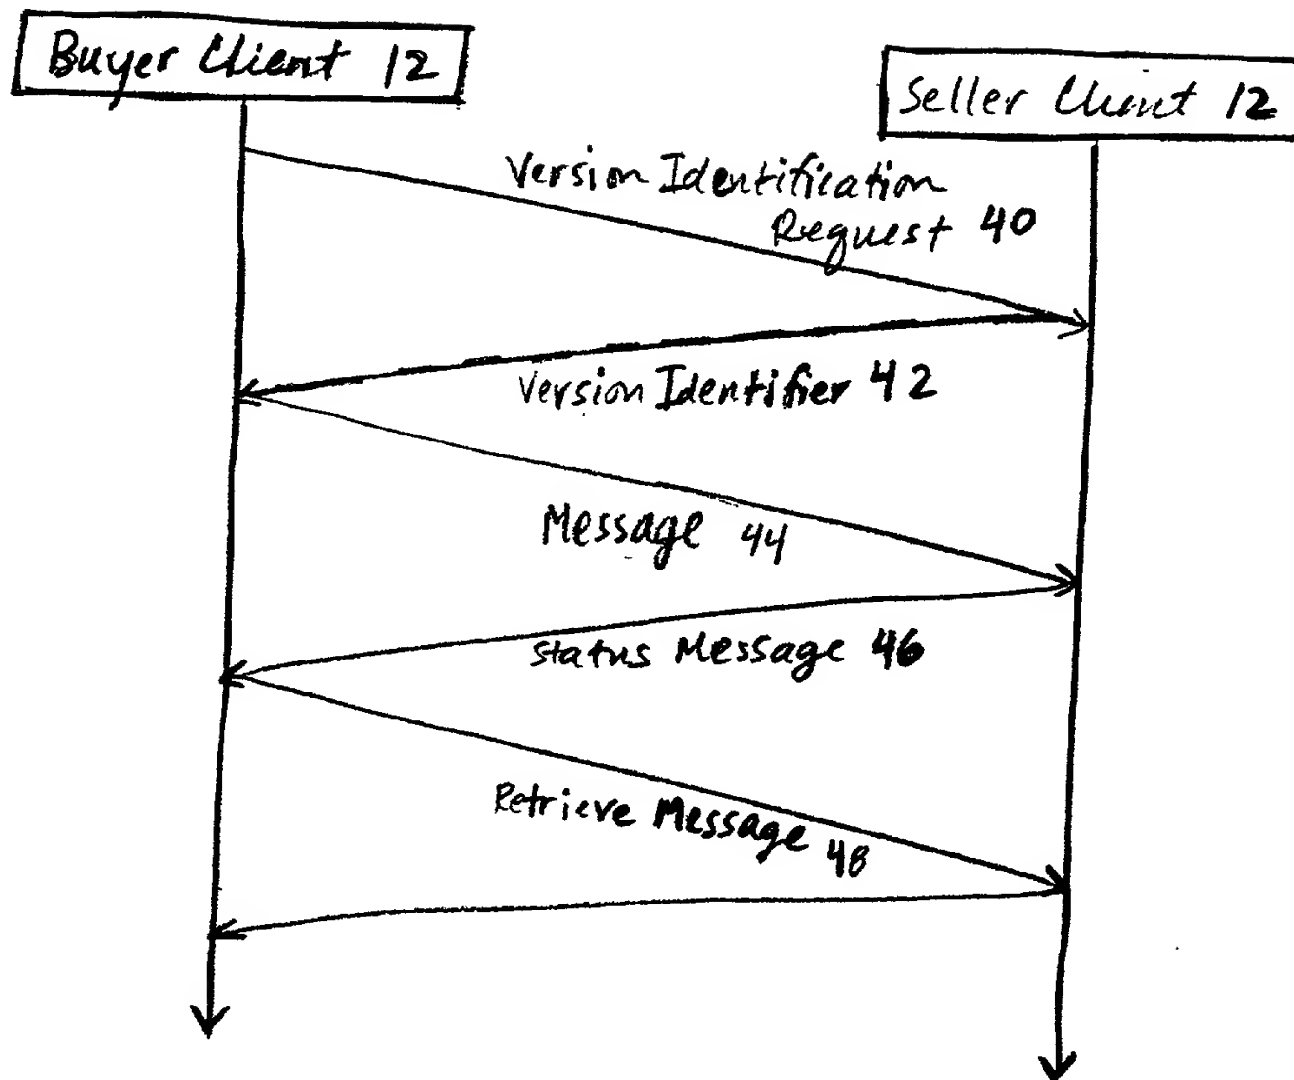


FIGURE 3B

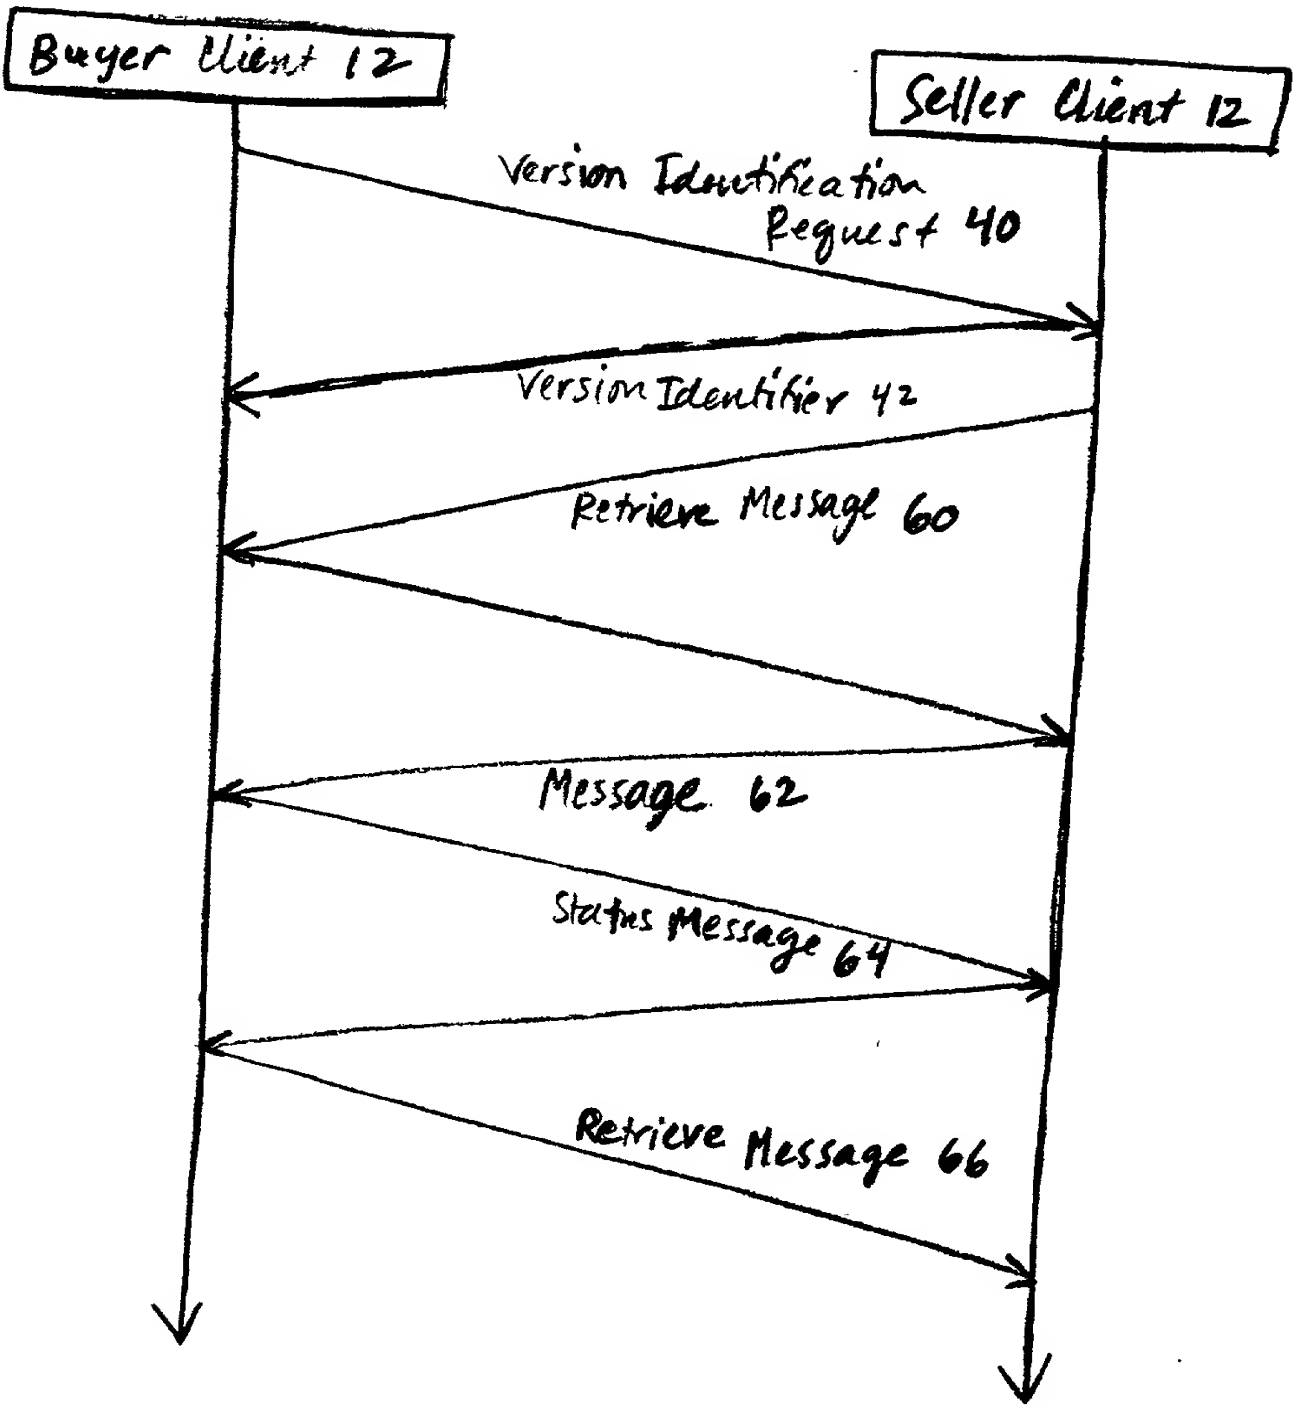

2025-05-20 15:00:00

FIGURE 4

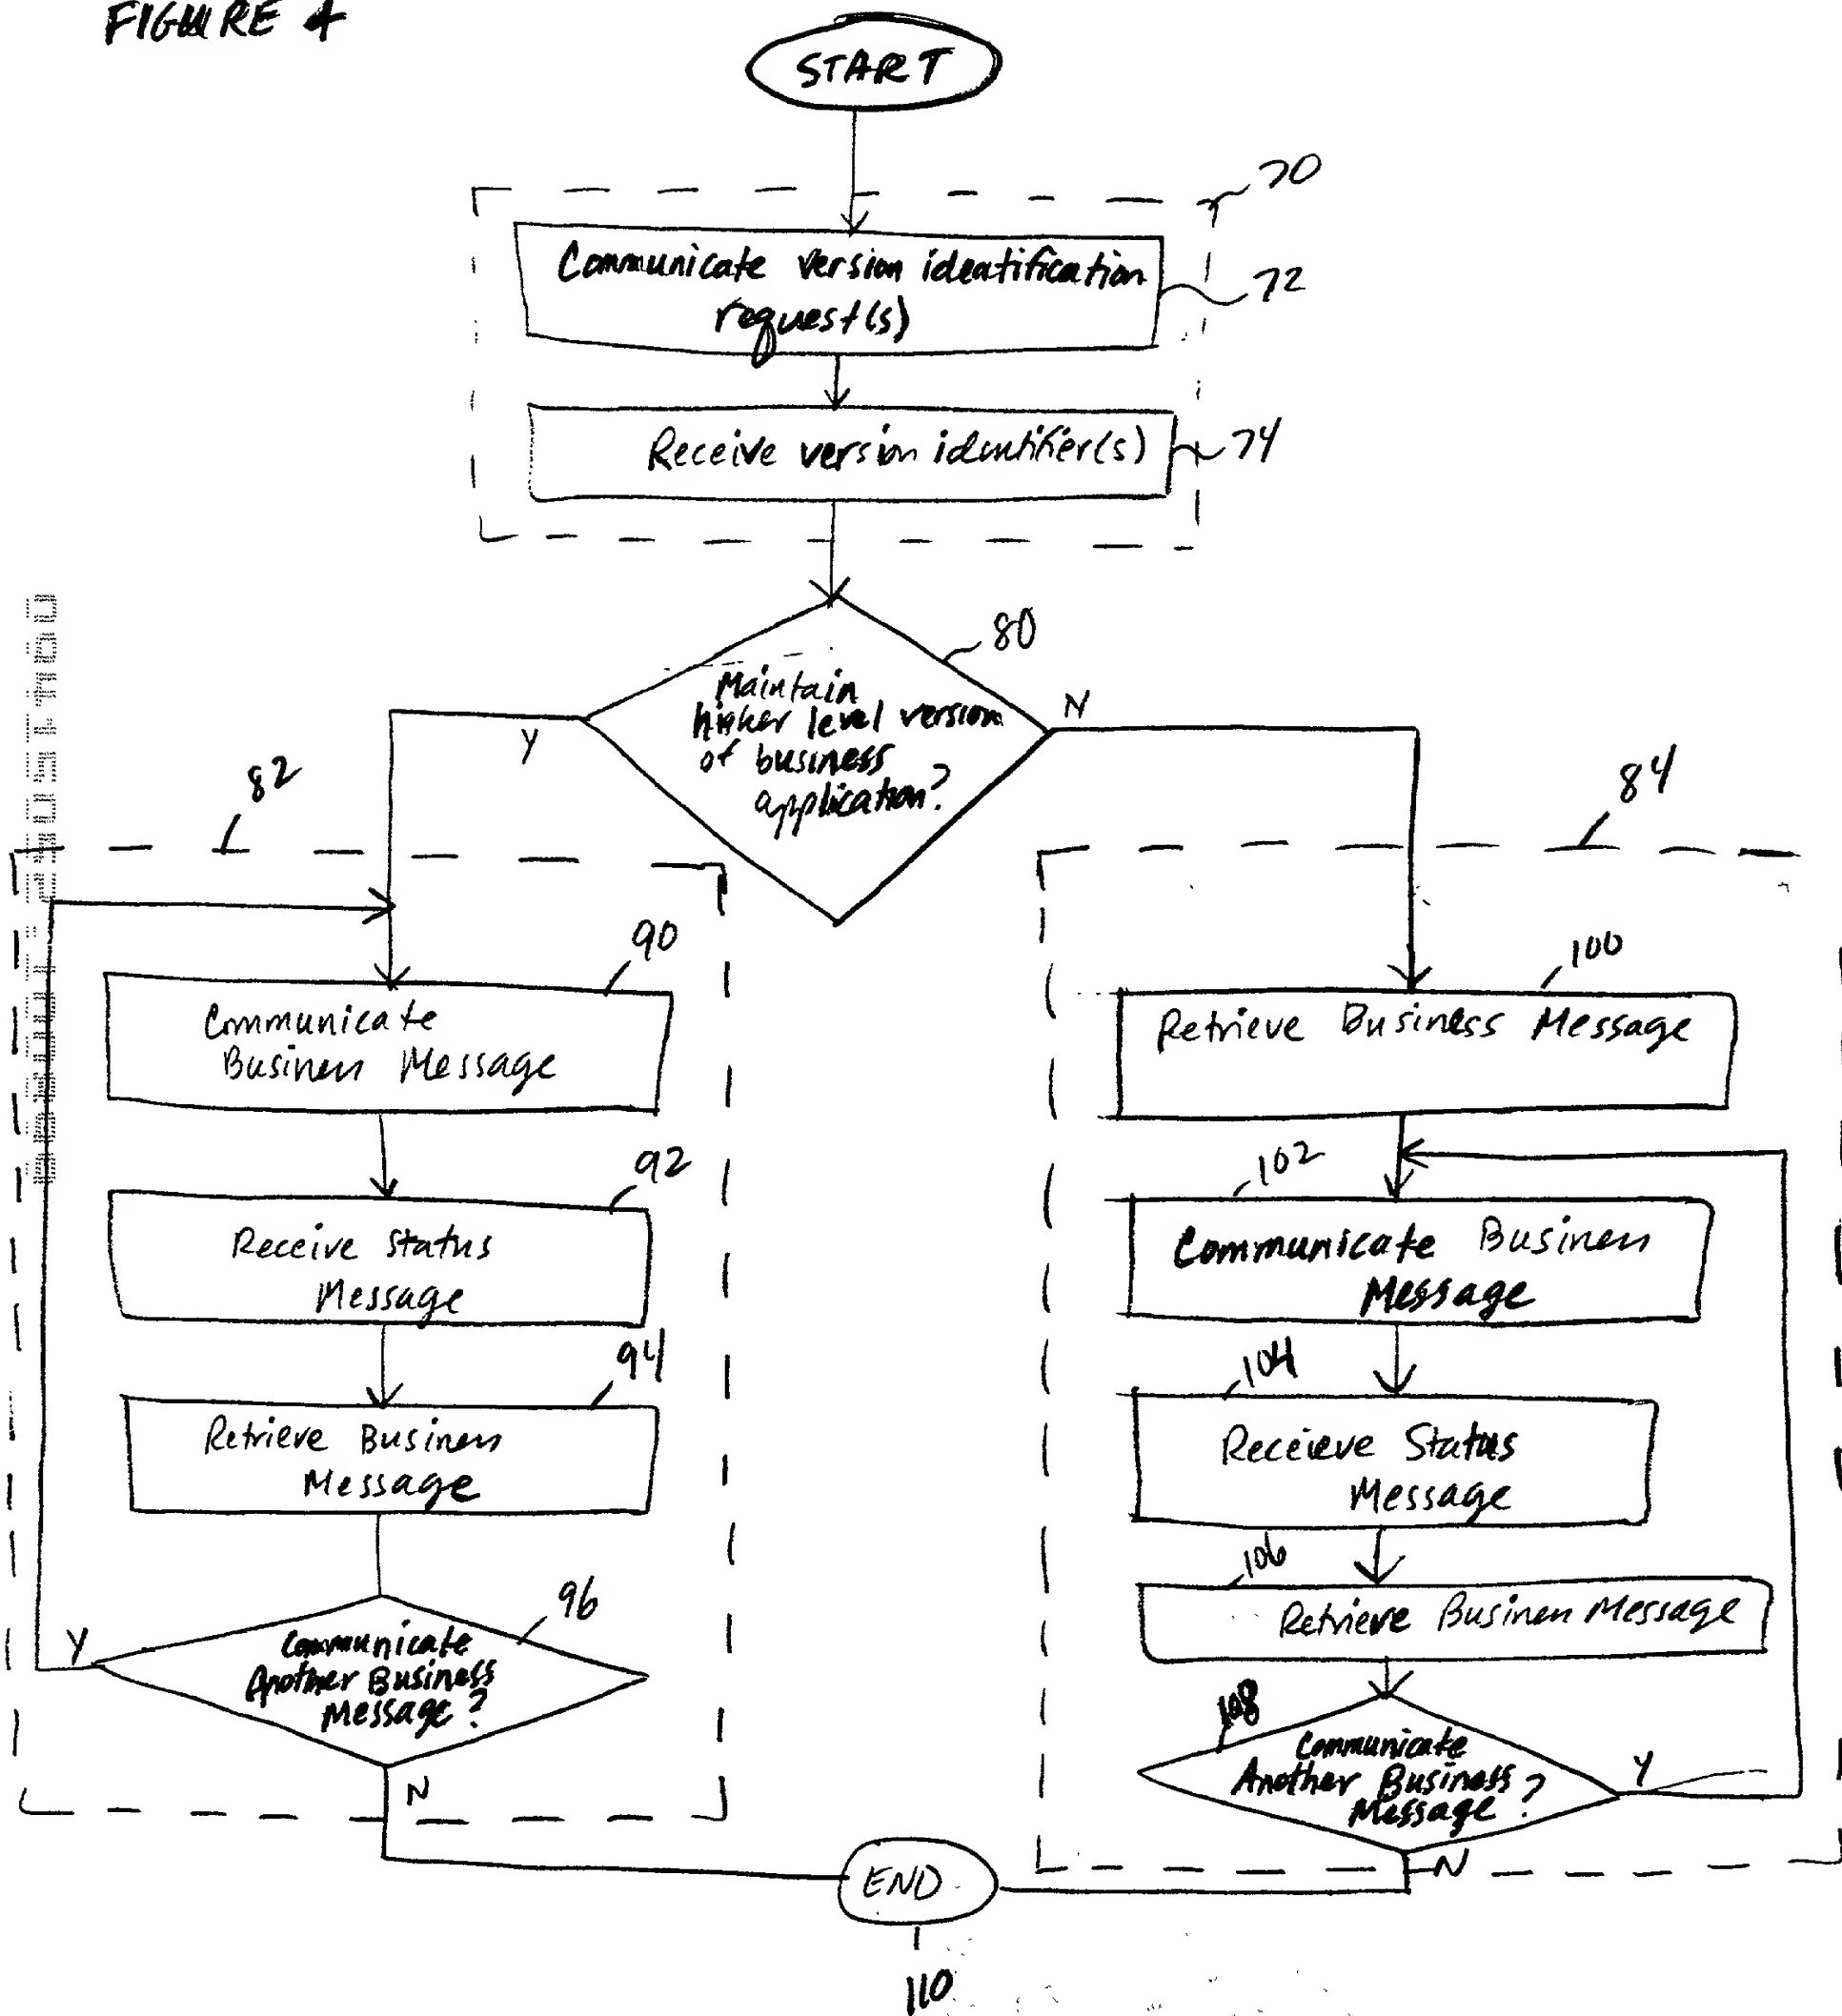

DECLARATION AND POWER OF ATTORNEY

As a below named inventor, I declare that:

My residence, post office address and citizenship are as stated below next to my name; that I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention or design entitled SYSTEM AND METHOD FOR PERFORMING A BUSINESS PROCESS IN A MULTI-ENTERPRISE, COLLABORATING NETWORK the specification of which is attached hereto; that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above; and that I acknowledge the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application(s) for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

<u>Number</u>	<u>Country</u>	<u>Date Filed</u>	<u>Priority Claimed (Yes) (No)</u>
-----NONE-----			

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application(s) in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge

the duty to disclose to the U.S. Patent and Trademark Office all information known to me to be material to patentability as defined in 37 C.F.R. § 1.56 which became available between the filing date of the prior application(s) and the national or PCT international filing date of this application:

<u>Application</u> <u>Serial Number</u>	<u>Date Filed</u>	<u>Status</u>
-----NONE-----		

I hereby appoint:

Jerry W. Mills	Reg. No. 23,005
Robert M. Chiaviello, Jr.	Reg. No. 32,461
Samir A. Bhavsar	Reg. No. 41,617
James L. Baudino	Reg. No. 43,486
Thomas R. Felger	Reg. No. 28,842
Charles S. Fish	Reg. No. 35,870
Robert W. Holland	Reg. No. 40,020
Wei Wei Jeang	Reg. No. 33,305
Jay B. Johnson	Reg. No. 38,193
Christopher W. Kennerly	Reg. No. 40,675
Tara D. Knapp	Reg. No. 43,723
Douglas M. Kubehl	Reg. No. 41,915
Ann C. Livingston	Reg. No. 32,479
Kevin J. Meek	Reg. No. 33,738
Harold E. Meier	Reg. No. 22,428
Randall W. Mishler	Reg. No. 42,006
Scott T. Morris	Reg. No. 43,818
Barton E. Showalter	Reg. No. 38,302
T. Murray Smith	Reg. No. 30,222
Terry J. Stalford	Reg. No. 39,522
David G. Wille	Reg. No. 38,363
Bradley P. Williams	Reg. No. 40,227
Rodger L. Tate	Reg. No. 27,399
Scott F. Partridge	Reg. No. 28,142
James B. Arpin	Reg. No. 33,470
James Remenick	Reg. No. 36,902
Roger J. Fulghum	Reg. No. 39,678
Thomas R. Nesbitt, Jr.	Reg. No. 22,075
James J. Maune	Reg. No. 26,946

all of the firm of Baker & Botts, L.L.P., my attorneys with full power of substitution and revocation, to prosecute this application and to transact all business in the United States

Patent and Trademark Office connected therewith, and to file and prosecute any international patent applications filed thereon before any international authorities under the Patent Cooperation Treaty.

Send Correspondence To:

Baker & Botts, L.L.P.
2001 Ross Avenue
Dallas, Texas 75201-2980

Direct Telephone Calls To:

Christopher W. Kennerly
at (214) 953-6812
Attorney Docket No. 020431.0560

I declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application or any patent issuing thereon.

Full name of first inventor

Ranjit N. Notani

Inventor's signature

R. N. Notani

Date

10/8/99

Residence (City, County, State)

Irving, Dallas County,
Texas

Citizenship

India

Post Office Address

1218 Hidden Ridge #2070
Irving, Texas 75038